

Doc. Number :
■ Tentative Target Specification
Preliminary Specification
Approval Specification

MODEL NO.: G070ACE SUFFIX: L01

Customer:	
APPROVED BY	SIGNATURE
Name / Title Note	
Please return 1 copy for your signature and comments.	our confirmation with your

Approved By	Checked By	Prepared By

Version 1.0 11 October 2018 1 / 26



CONTENTS

1. GENERAL DESCRIPTION	4
1.1 OVERVIEW	4
1.2 GENERAL SPECIFICATIONS	4
2. MECHANICAL SPECIFICATIONS	4
3. ABSOLUTE MAXIMUM RATINGS	5
3.1 ABSOLUTE RATINGS OF ENVIRONMENT	5
3.2 ELECTRICAL ABSOLUTE RATINGS	6
3.2.1 TFT LCD MODULE	6
3.2.2 BACKLIGHT CONVERTER	6
4. ELECTRICAL SPECIFICATIONS	
4.1 FUNCTION BLOCK DIAGRAM	6
4.2. INTERFACE CONNECTIONS	7
4.3 ELECTRICAL CHARACTERISTICS	8
4.3.1 LCD ELETRONICS SPECIFICATION	8
4.3.2 Vcc Power Dip Condition	10
4.4 LVDS INPUT SIGNAL SPECIFICATIONS	11
4.4.1 LVDS DATA MAPPING TABLE	11
4.5 DISPLAY TIMING SPECIFICATIONS	12
4.6 POWER ON/OFF SEQUENCE	14
5. OPTICAL CHARACTERISTICS	15
5.1 TEST CONDITIONS	15
5.2 OPTICAL SPECIFICATIONS	15
6. RELIABILITY TEST ITEM	18
7. PACKING	
8. MODULE LABEL	20
9. PRECAUTIONS	22
9.1 ASSEMBLY AND HANDLING PRECAUTIONS	22
9.2 STORAGE PRECAUTIONS	22
9.3 OPERATION PRECAUTIONS	
9.4 SAFETY PRECAUTIONS	22
9.5 SAFETY STANDARDS	23
9.6 OTHER	23



REVISION HISTORY

Version	Date	Page	Description
0.0	May.4, 2018		Spec Ver. 1.0 was first issued.

Version 1.0 11 October 2018 3 / 26



1. GENERAL DESCRIPTION

1.1 OVERVIEW

G070ACE-L01 is a 7" TFT Liquid Crystal Display module with WLED Backlight unit and 30 pins 1ch-LVDS interface. This module supports 800xRGBx480 AAS mode and can display 262k or 16.2M colors.

1.2 GENERAL SPECIFICATIONS

Item	Specification	Unit	Note
Screen Size	7" real diagonal		
Driver Element	a-si TFT active matrix	-	-
Pixel Number	800 x R.G.B. x 480	pixel	-
Pixel Pitch	0.1905 (H) x 0.1905 (V)	mm	-
Pixel Arrangement	RGB stripe	-	-
Display Colors	RGB 8bits=16M	color	-
Transmissive Mode	Normally Black	-	-
Surface Treatment	AG type, 3H hard coating,	-	-
Luminance, White	350(Typ.)	Cd/m2	
Color Gamut	70 % of NTSC(Typ.)	-	-
Power Consumption	(Total : TBD)		

2. MECHANICAL SPECIFICATIONS

It	em	Min.	Тур.	Max.	Unit	Note
	Horizontal (H)	167.7	168.0	168.3	mm	(4)
Module Size	Vertical (V)	107.4	107.7	108.0	mm	(1) (2)
	Thickness (T)	5.7	6.0	6.3	mm	(2)
Bezel Area	Horizontal	154.10	154.40	154.70	mm	
Dezei Alea	Vertical	93.14	93.44	93.74	mm	
Active Area	Horizontal	-	152.4	-	mm	
Active Alea	Vertical	-	91.44	-	mm	
Weight		-	TBD	-	g	

Note (1) Module Outline Size without User hold. (Based on 2D Drawing)

(2) Module Thickness Size without PCBA/Connector. (Based on 2D Drawing)



3. ABSOLUTE MAXIMUM RATINGS


3.1 ABSOLUTE RATINGS OF ENVIRONMENT

ltom	Cumbal	Va	lue	Lloit	Note	
Item	Symbol	Min.	Max.	Unit		
Storage Temperature	Tst	-10	80	$^{\circ}\!\mathbb{C}$	(1), (2)	
Operating Ambient Temperature	Тор	0	70	$^{\circ}\!\mathbb{C}$	(1), (2)	

Note (1) Temperature and relative humidity range is shown in the figure below.

- (a) 90 %RH Max. (Ta \leq 40 °C).
- (b) Wet-bulb temperature should be 39 °C Max. (Ta > 40 °C).
- (c) No condensation.
- (2) The absolute maximum rating values of this product are not allowed to be exceeded at any times. The module should not be used over the absolute maximum rating value. It will cause permanently unrecoverable function fail in such an condition

Relative Humidity (%RH)

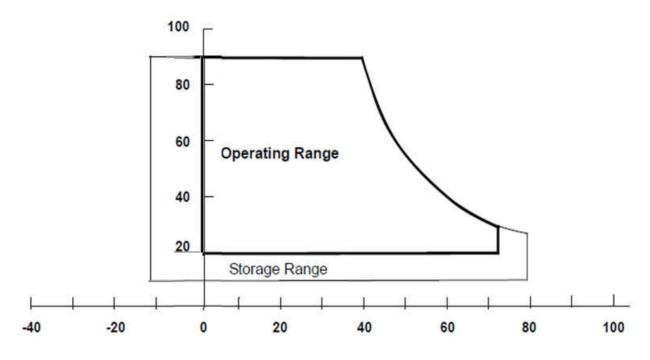

Version 1.0 11 October 2018 5 / 26



3.2 ELECTRICAL ABSOLUTE RATINGS

3.2.1 TFT LCD MODULE

Item	Symbol	Val	ue	Unit	Note	
item	Symbol	Min.	Max.	- Office	Note	
Power Supply Voltage	Vcc	-0.3	3.6	V	(1)	
Logic Input Voltage	V _{IN}	-0.3	3.6	V	(1)	

3.2.2 BACKLIGHT CONVERTER


ltom	Cymbal	Value			Unit	Note	
Item	Symbol	Min.	Тур	Max.	Uliit	Note	
Converter Voltage	LED_V _{in}	0	12.0	18.0	V	(1), (2)	
Enable Voltage	LED_EN	0	3.3 / 5	7	V	Duty=100%	
Backlight Adjust	LED_PWM	0	3.3 / 5	7	V	(1), (2) Pulse Width≦10msec. and Duty≦10%	

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

Note (2) Specified values are for input pin of LED light bar at Ta=25±2 °C (Refer to 4.3.3 and 4.3.4 for further information)

4. ELECTRICAL SPECIFICATIONS

4.1 FUNCTION BLOCK DIAGRAM

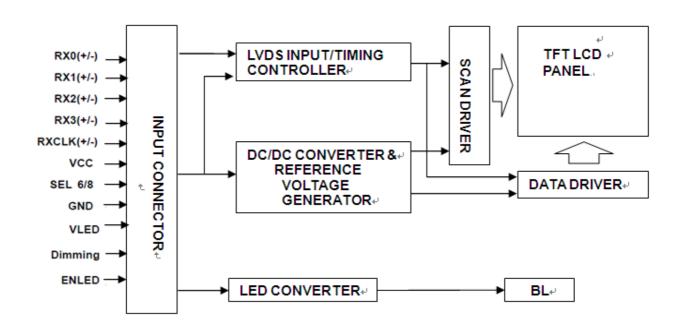

Version 1.0 11 October 2018 6 / 26



4.2. INTERFACE CONNECTIONS

PIN ASSIGNMENT

Pin No.	Symbol	Description	Note
1	12V	LED power	-
2	12V	LED power	-
3	12V	LED power	-
4	12V	LED power	-
5	ENLED	Enable pin	-
6	Dimming	Backlight Adjust	-
7	NC	No Conncetion (Reserve for INX test)	(3)
8	NC	No Conncetion (Reserve for INX test)	(3)
9	VCC	Power supply: +3.3V	
10	VCC	Power supply: +3.3V	-
11	GND	Ground	-
12	GND	Ground	-
13	RX0-	Negative transmission data of pixel 0	-
14	RX0+	Positive transmission data of pixel 0	-
15	GND	Ground	-
16	RX1-	Negative transmission data of pixel 1	-
17	RX1+	Positive transmission data of pixel 1	-
18	GND	Ground	-
19	RX2-	Negative transmission data of pixel 2	-
20	RX2+	Positive transmission data of pixel 2	-
21	GND	Ground	-
22	RXCLK-	Negative of clock	-
23	RXCLK+	Positive of clock	-
24	GND	Ground	-
25	RX3-	Negative transmission data of pixel 3	-
26	RX3+	Positive transmission data of pixel 3	-
27	GND	Ground	-
		LVDS 6/8 bit select function control,	
28	SEL6/8 Low → 6 bit Input Mode		(2)
		High or NC → 8bit Input Mode	
29	GND	Ground	-
30	GND	Ground	-

Note (1) Connector Part No.: Starconn 093G30-B0001A-G4.

Note (2) "Low" stands for 0V. "High" stands for 3.3V

Note(3) Pin7, Pin8 input signals should be set to no connection or ground, this module would operate normally.




4.3 ELECTRICAL CHARACTERISTICS

4.3.1 LCD ELETRONICS SPECIFICATION


Daramete	Parameter		Value			Unit	Note
Paramete	Symbol	Min.	Тур.	Max.	Unit	Note	
Power Supply '	Voltage	Vcc	3	3.3	3.6	V	-
Ripple Volta	age	V_{RP}	-	-	100	mVp-p	-
Rush Curre	ent	I _{RUSH}	-	-	TBD	Α	(2)
	White	-	-	TBD	•	Α	(3)a
Power Supply Current	Black	-	-	TBD	ı	Α	(3)b
	Vertical Stripe	-	-	TBD	ı	Α	(3)c
Power Consur	nption	PLCD	-	TBD	ı	Watt	
LVDS differential input voltage		Vid	200		600	mV	
LVDS common input voltage		Vic	1.0	1.2	1.4	V	
LVDS terminating	g resistor	R_T	·	100		ohm	

Note (1) The ambient temperature is $Ta = 25 \pm 2$ °C.

Note (2) Measurement Conditions:

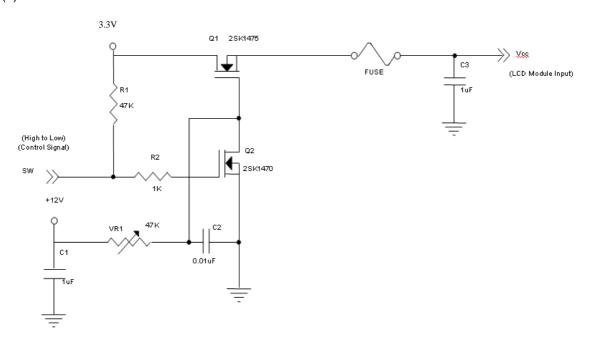


Vcc rising time is 470µs

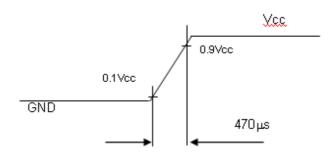

Version 1.0 11 October 2018 8 / 26




Note (3) The specified power supply current is under the conditions at Vcc = 3.3 V, Ta = 25 \pm 2 $^{\circ}$ C, Fr = 60Hz, whereas a power dissipation check pattern below is displayed.

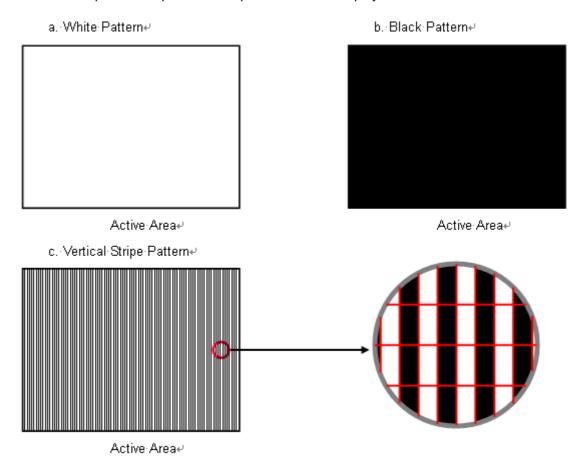

Note (4) The power consumption is specified at the pattern with the maximum current.

Note (5) VID waveform condition

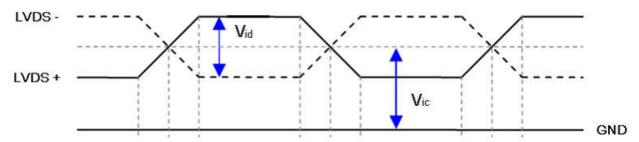


Version 1.0 11 October 2018 9 / 26



4.3.2 BACKLIGHT UNIT

Param	Symbol	Min.	Value Typ.	Max.	Unit	Note	
Converter Power	Converter Power Supply Voltage				13.2	V	
Converter Power	Supply Current	li		0.36		Α	@LED_Vin= 12V Duty=100%
Converter Input	lirsh		4.3		Α	@LED_Vin rising = 1mS	
Power Cons	P _{LED}		2.8		W	@ LED_Vin = 12V Duty=100%	
EN Control Level	Backlight on	LED EN	2.0	0	5.0	V	
LIV CONTROL ECVE	Backlight off		0	0	8.0	V	
PWM Control Level	PWM High Level	LED PWM	2.0	0	5.0	V	
P WW Control Level	PWM Low Level		0	0	0.15	V	
PWM Control		5		100	%		
PWM Control	f _{PWM}	100	200	(300)	Hz		
LED Life	LL	(50,000)			Hrs	(2)	

- Note (1) LED light bar input voltage and current are measured by utilizing a true RMS multimeter as shown below:
- Note (2) The lifetime of LED is estimated data and defined as the time when it continues to operate under the conditions at $Ta = 25\pm2^{\circ}C$ and Duty 100% until the brightness becomes $\leq 50\%$ of its original value. Operating LED under high temperature environment will reduce life time and lead to color shift.

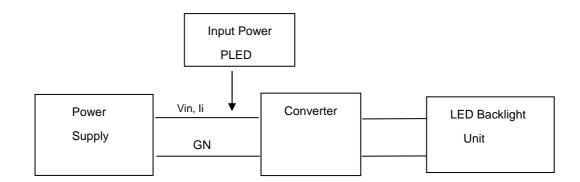

Version 1.0 11 October 2018 10 / 26



4.4 LVDS INPUT SIGNAL SPECIFICATIONS

4.4.1 LVDS DATA MAPPING TABLE

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of color versus data input.

												Da	ta S	Sign	al										
	Color				Re									een							Bl				
	_	R7	R6	R5	R4	R3	R2	R1	R0	G7		G5	G4	G3		G1	G0	B7	B6	B5	B4	В3	B2	B1	B0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Basic	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Colors	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Scale	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Of	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Red	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Reu	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
Gray	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
Scale	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Of	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Green	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
Green	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Gray	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Scale	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Of	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Blue	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
Diue	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note (1) 0: Low Level Voltage, 1: High Level Voltage



4.5 DISPLAY TIMING SPECIFICATIONS


The input signal timing specifications are shown as the following table and timing diagram.

Signal	Item	Symbol	Min.	Тур.	Max.	Unit	Note	
	Frequency	Fc		(25.4)		MHz	-	
	Period	Tc		(39.37)		ns		
	Input cycle to cycle jitter	T _{rcl}	(-0.02*Tc)		(0.02*Tc)	ns	(3)	
	Input clock to data skew	TLVCCS	(-0.02*Tc)		(0.02*Tc)	ns	(4)	
LVDS Clock	Spread spectrum modulation range	Fclkin_mo d	(FC*98%)		(FC*102%)		(F)	
	Spread spectrum modulation frequency				(200)	KHz	(5)	
	Frame Rate	Fr		60		Hz	Tv=Tvd+Tv b	
Vertical Display Term	Total	Tv		(490)		Th	-	
	Active Display	Tvd		480		Th	-	
	Blank	Tvb	Tv-Tvd	(10)	Tv-Tvd	Th	-	
Harizantal Diaplay Tarm	Total	Th		(864)		Тс	Th=Thd+Th b	
Horizontal Display Term	Active Display	Thd		800		Tc	-	
	Blank	Thb	Th-Thd	(64)	Th-Thd	ns ns ns hHz KHz Hz Th Th Th Tc	-	

Note (1) Because this module is operated by DE only mode, Hsync and Vsync input signals are ignored.

Note (2) The Tv(Tvd+Tvb) must be integer, otherwise, this module would operate abnormally.


INPUT SIGNAL TIMING DIAGRAM

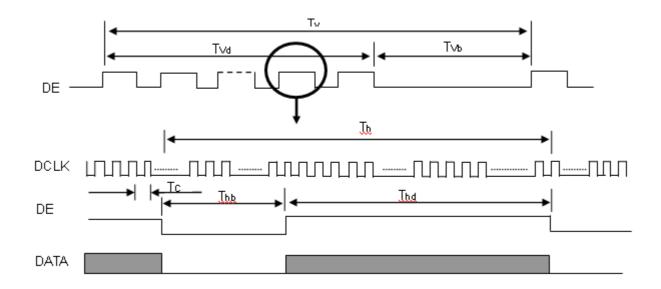


Version 1.0 11 October 2018 12 / 26




Note (3) The input clock cycle-to-cycle jitter is defined as below figures. Trcl = $IT_1 - TI$

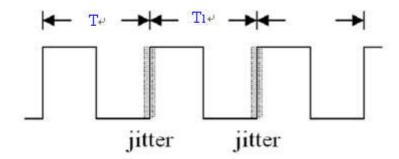

Note (4) Input Clock to data skew is defined as below figures.

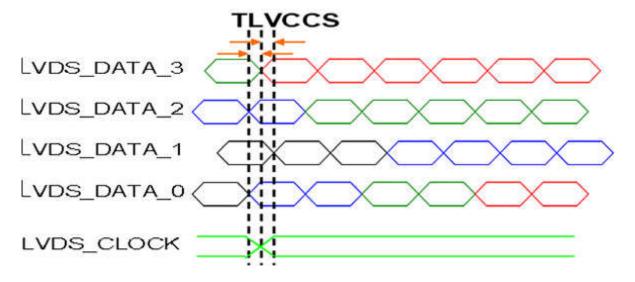

Note (5) The SSCG (Spread spectrum clock generator) is defined as below figures.

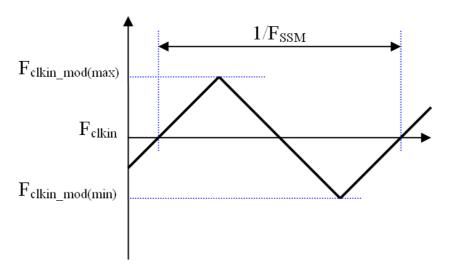


Version 1.0 11 October 2018 13 / 26





4.6 POWER ON/OFF SEQUENCE

The power sequence specifications are shown as the following table and diagram.

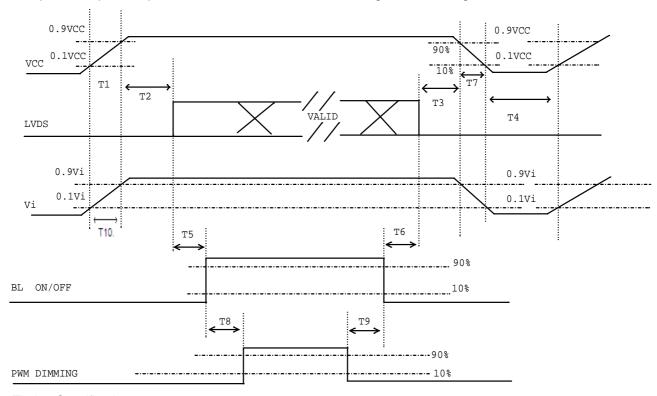

Timing Specifications:

comoanons.				
Dovometer		Lleite		
Parameter	Min	Тур	Max	Units
T1	0.5	-	10	ms
T2	0	-	50	ms
Т3	0	-	50	ms
T4	500	ı	-	ms
T5	200	ı	-	ms
T6	200	-	-	ms
T7	5	-	100	ms
Т8	10	ı	-	ms
Т9	10	-	_	ms
T10	20			

- Note (1) Please avoid floating state of interface signal at invalid period.
- Note (2) When the interface signal is invalid, be sure to pull down the power supply of LCD VCC to 0 V.
- Note (3) The Backlight converter power must be turned on after the power supply for the logic and the interface signal is valid. The Backlight converter power must be turned off before the power supply for the logic and the interface signal is invalid.

Version 1.0 11 October 2018 14 / 26



5. OPTICAL CHARACTERISTICS

5.1 TEST CONDITIONS

Item	Symbol	Value	Unit		
Ambient Temperature	Та	25±2	$^{\circ}\!\mathbb{C}$		
Ambient Humidity	Ha	50±10	%RH		
Supply Voltage	A I'm to to to all a local HELEOTRICAL				
Input Signal	According to typical value in "ELECTRICAL CHARACTERISTICS"				
LED Light Bar Input Current Per Input Pin		OTALKAOT ERIOT	100		

5.2 OPTICAL SPECIFICATIONS


The relative measurement methods of optical characteristics are shown in 5.2 and all items are measured at the center point of screen except white variation. The following items should be measured under the test conditions described in 5.1 and stable environment shown in Note (5).

Iter	n	Symbol	Condition	Min.	Тур.	Max.	Unit	Note	
	Bod	Rx			TBD				
	Red	Ry			TBD				
	Green	Gx			TBD		- (1), cd/m ² (4), - (2), - ms (3), % (5),		
Color	Green	Gy	0 00 0 00	Тур –	TBD	Typ +		(1) (E)	
Chromaticity (CIE 1931)	Dive	Bx	$\theta_x=0^\circ, \ \theta_Y=0^\circ$	CS-2000 =G=B=255 TBD 0.05	TBD		-	(1), (5)	
(6.2 .66.)	Blue	Ву	R=G=B=255						
	\\\/\-:4~	Wx	Gray scale						
	White	Wy			(0.329)				
Center Luminance of White		L _C		(360)	(450)	-	cd/m ²	(4), (5)	
Contrast	Contrast Ratio			(600)	(800) -		-	(2), (5)	
Resnons	a Tima	T _R	$\theta_x=0^\circ, \ \theta_Y=0^\circ$	-	(13)	-	me	(3)	
Respons	Response Time		$\theta_X = 0$, $\theta_Y = 0$	-	(12)	-	1113	(3)	
White Variation		W	$\theta_x=0^\circ$, $\theta_Y=0^\circ$	(70)	-	-	%	(5), (6)	
	Horizontal	θ_x +		(89)	(89)				
Viewing Angle	Honzontai	θ_{x} -	CR ≥ 10	(89)	(89)		Dea	(1), (5)	
Viewing Angle	Vertical	θ_{Y} +	OK = 10	(89)	(89)		Deg.	(1), (3)	
	vertical	θ_{Y} -		(89)	(89)		cd/m² - ms %		

Version 1.0 11 October 2018 15 / 26



Note (1) Definition of Viewing Angle (θx , θy):

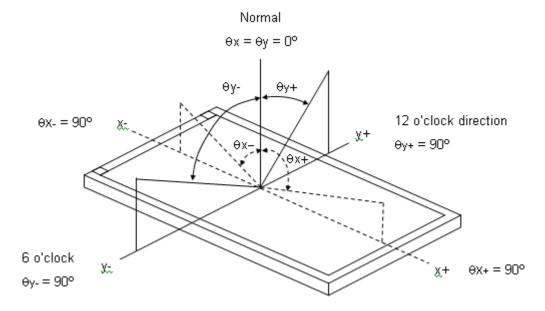

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

Contrast Ratio (CR) = L255 / L0


L255: Luminance of gray level 255

L 0: Luminance of gray level 0

CR = CR (5)

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time (T_R, T_F):

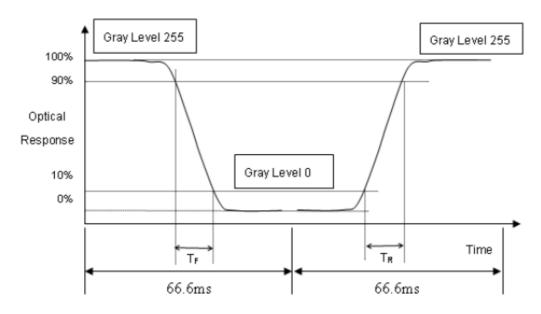

Version 1.0 11 October 2018 16 / 26



Note (4) Definition of Luminance of White (L_C):


Measure the luminance of gray level 255 at center point

$$L_C = L(5)$$

L(x) is corresponding to the luminance of the point X at Figure in Note (6).

Note (5) Measurement Setup:


The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a windless room.

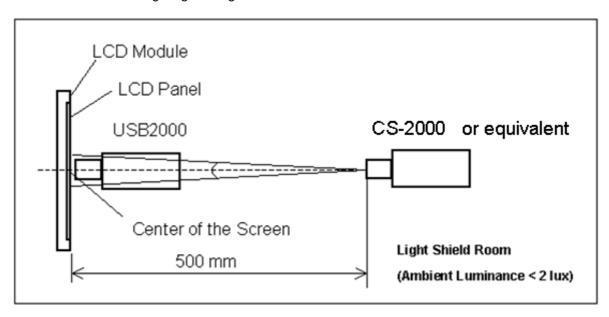

Note (6) Definition of White Variation (δW):

Measure the luminance of gray level 255 at 5 points

 $\delta W = (Minimum [L (1) \sim L (5)] / Maximum [L (1) \sim L (5)]) *100%$

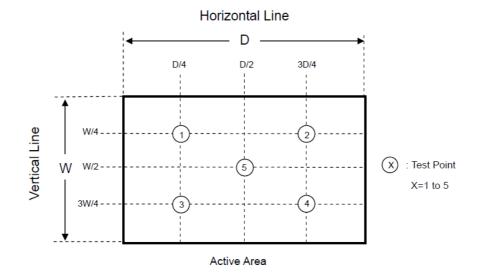

Version 1.0 11 October 2018 17 / 26



6. RELIABILITY TEST ITEM

Test Item	Test Condition	Note
High Temperature Storage Test	80°C, 504 hours	
Low Temperature Storage Test	-10°C, 504 hours	
Thermal Shock Storage Test	-10°C, 0.5hour ←→80°C, 0.5hour; 1hour/cycle,100cycles	(1)(2) (4)(5)
High Temperature Operation Test	70°C, 504 hours	(1)(0)
Low Temperature Operation Test	0°C, 504 hours	
High Temperature & High Humidity Operation Test	60°C, 90%RH, 504hours	(1)(2) (4)(6)
Shock (Non-Operating)	50G, 11ms, half sine wave, 1 time for ± X, ± Y, ± Z.	(2)(3)
Vibration (Non-Operating)	1.5G, 10 ~ 300 Hz, 10min/cycle, 3 cycles each X, Y, Z	(2)(3)

- Note (1) There should be no condensation on the surface of panel during test.
- Note (2) Temperature of panel display surface area should be 85 °C Max.
- Note (3) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.
- Note (4) In the standard conditions, there is no function failure issue occurred. All the cosmetic specification is judged before reliability test.
- Note (5) Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.
- Note (6) Before cosmetic and function test, the product must have enough recovery time, at least 24 hours at room temperature.



7. PACKING

7.1 PACKING SPECIFICATIONS

- (1) 40 pcs LCD modules / 1 Box
- (2) Box dimensions: 445 (L) X 370 (W) X 275 (H) mm
- (3) Weight: approximately 8.08Kg (40modules per box)

7.2 PACKING METHOD

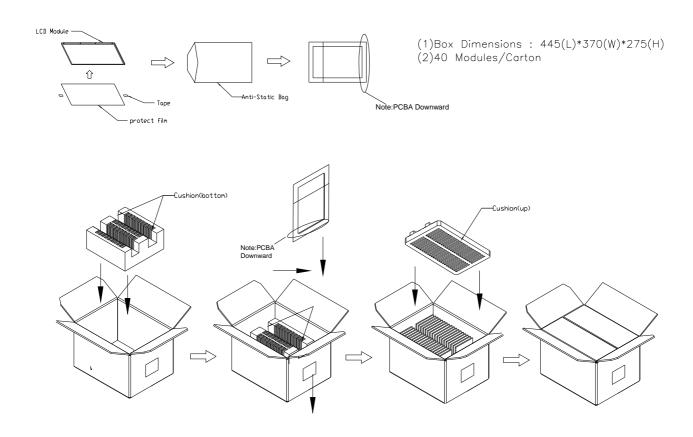


Figure. 7-1 Packing

Version 1.0 11 October 2018 19 / 26



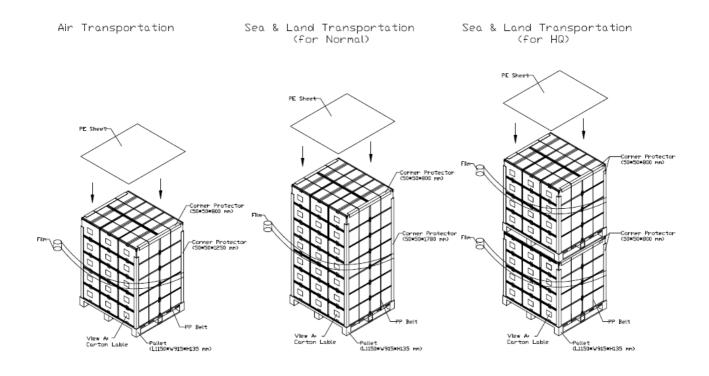


Figure. 7-2 Packing

7.3 UN-PACKING METHOD

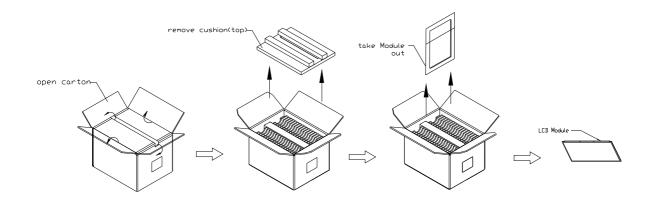


Figure. 7-3 UN-Packing


Version 1.0 11 October 2018 20 / 26



8. MODULE LABEL

8.1 INX MODULE LABEL


The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.

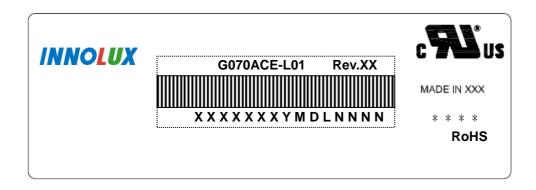

(a) Model Name: G070ACE-L01

(b) Revision: Rev. XX, for example: A1, B1, C1, C2 ...etc.

(c) * * * * : Factory ID

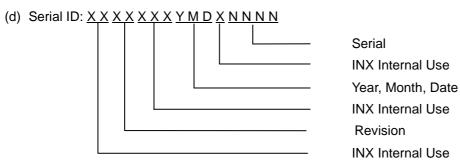

Serial ID includes the information as below:

(a) Manufactured Date: Year: 1~9, for 2011~2019

Month: 1~9, A~C, for Jan. ~ Dec.

Day: 1~9, A~Y, for 1st to 31st, exclude I, O and U

(b) Revision Code: cover all the change

(c) Serial No.: Manufacturing sequence of product



9. PRECAUTIONS

9.1 ASSEMBLY AND HANDLING PRECAUTIONS

- (1) Do not apply rough force such as bending or twisting to the module during assembly.
- (2) To assemble or install module into user's system can be only in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- (3) It's not permitted to have pressure or impulse on the module because the LCD panel and Backlight will be damaged.
- (4) Always follow the correct power sequence when LCD module is connecting and operating. This can prevent damage to the CMOS LSI chips during latch-up.
- (5) Do not pull the I/F connector in or out while the module is operating.
- (6) Do not disassemble the module.
- (7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- (8) It is dangerous that moisture come into or contacted the LCD module, because moisture may damage LCD module when it is operating.
- (9) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (10)When ambient temperature is lower than 10[°]C may reduce the display quality. For example, the response time will become slowly.

9.2 STORAGE PRECAUTIONS

- (1) Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0°C to 35°C and relative humidity of less than 70%
- (2) Do not store the TFT LCD module in direct sunlight
- (3) The module should be stored in dark place. It is prohibited to apply sunlight or fluorescent light in storing

9.3 OPERATION PRECAUTIONS

(1) The LCD product should be operated under normal condition.

Normal condition is defined as below:

Temperature : 20±15°C Humidity: 65±20%

Display pattern: continually changing pattern(Not stationary)

(2) If the product will be used in extreme conditions such as high temperature, high humidity, high altitude , display pattern or operation time etc... It is strongly recommended to contact CMI for application engineering advice. Otherwise, Its reliability and function may not be guaranteed.

9.4 SAFETY PRECAUTIONS

- (1) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- (2) After the module's end of life, it is not harmful in case of normal operation and storage.



9.5 SAFETY STANDARDS

The LCD module should be certified with safety regulations as follows:

- (1) UL60950-1 or updated standard.
- (2) IEC60950-1 or updated standard.


9.6 OTHER

When fixed patterns are displayed for a long time, remnant image is likely to occur



1 MECHANICAL DESCRIPTION

1.1 Module drawing (2018-05-03)

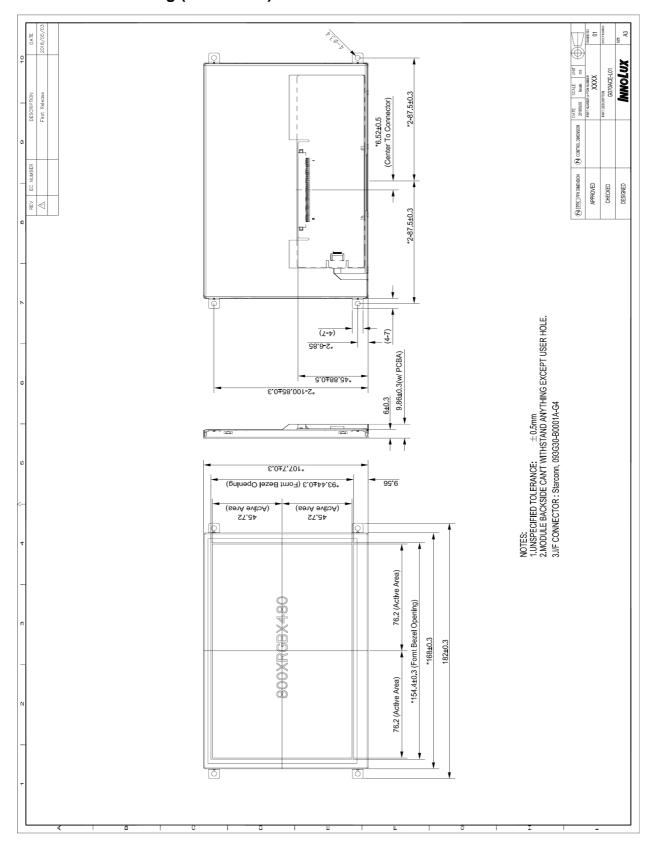

Version 1.0 11 October 2018 24 / 26